

International Journal of Scientific Research and Reviews

A Review on Power Factor Correction DC/DC Converters for Brushless Dc Motor Drives

V. Aishwarya^{1*} and K. Gnana Sheela²

¹Department of Electrical & Electronics Engineering, Toc H Institute of Science and Technology, Ernakulam 682 313, KERALA, INDIA, Email : aishwarya365@gmail.com

²Department of Electronics & Communication Engineering, Toc H Institute of Science and Technology, Ernakulam 682 313, KERALA, INDIA, Email : sheelabijins@gmail.com

ABSTRACT

This paper explains the detailed classification of power factor correction(PFC) DC/DC converters. PFC DC/DC converters are categorized into Non-isolated and Isolated type; based on the use of a High Frequency Transformer isolating the output side from the input side. Non-isolated converter topologies have the advantages like light weight & small size; at the cost of higher number of components. Isolated topology provides high-frequency isolation of the output from the input, and voltage scaling benefits; by employing a high-frequency transformer between the power stage and the output side. Thus, the cost of this converter topology is high. Non-isolated topologies are categorized as: Buck, Boost, Buck-boost, Cuk, SEPIC, Zeta, Luo, Canonical Switching Cell, (CSC), Landsman and Sheppard Taylor converters; whereas, Isolated converter topologies are categorized as: Flyback, Forward, Isolated Buck, Isolated Boost, Isolated Buck-Boost, Isolated Cuk, Isolated SEPIC, Isolated Zeta, Isolated Luo, Isolated CSC, and Isolated Landsman converter. Non-Isolated & Isolated converter topologies are further classified into Bridged¹ and Bridgeless converters, depending on the use of a Diode Bridge Rectifier (DBR) in the circuit. IHQRR is another type of DC/DC converter that integrates two converter topologies, and hence provides the benefits of improved power quality, reduced switching losses, higher efficiency and performance similar to that of single-stage converters. Choice of a PFC converter topology relies upon the efficiency, size, weight application, and cost of the converter. Choice of the operational mode of a PFC converter is actually a trade-off between the switching stresses and the cost.

KEYWORDS: Brushless DC Motor, DC/DC Converter, Power Factor Correction, Discontinuous Conduction Mode, Continuous Conduction Mode.

***Corresponding Author**

Aishwarya V.

Department of Electrical & Electronics Engineering,

Toc H Institute of Science and Technology,

Ernakulam 682 313, KERALA, INDIA.

Email: aishwarya365@gmail.com, Mob No. – 9746329506

1. INTRODUCTION

Conventional BLDC motor drives are fed from a diode bridge rectifier^{6,8,21}(DBR), filter capacitor and a Voltage Source Inverter (VSI)^{8,16,21}. Drive speed is regulated by altering the switching sequence of the VSI. Here, the dc-bus voltage is kept constant, and the drive speed is regulated by variable frequency switching of the VSI, i.e., by controlling the frequency of the source voltage fed to the BLDC motor⁸. The dc-bus capacitor charges whenever voltage of the dc-bus, V_{dc} falls below the supply voltage, V_s during one cycle of the source voltage. Thus, the charging current of the dc-bus capacitor, C_d is pulsating in nature⁶. This source current is abundant in harmonics, having a high Total Harmonic Distortion, high Crest Factor^{1,8} and a low Power factor. This in turn causes a voltage distortion. High-frequency switching of the six VSI switches causes increased switching losses, decreasing the efficiency of the VSI. As the conduction losses and switching losses of the VSI switches increase, the overall efficiency of the drive system is decreased. Also, controlling the switching sequence of the VSI switches for regulating the motor speed increases the complexity of the control circuit. Thus, PFC circuits are employed to enhance the power factor to unity^{1,8}.

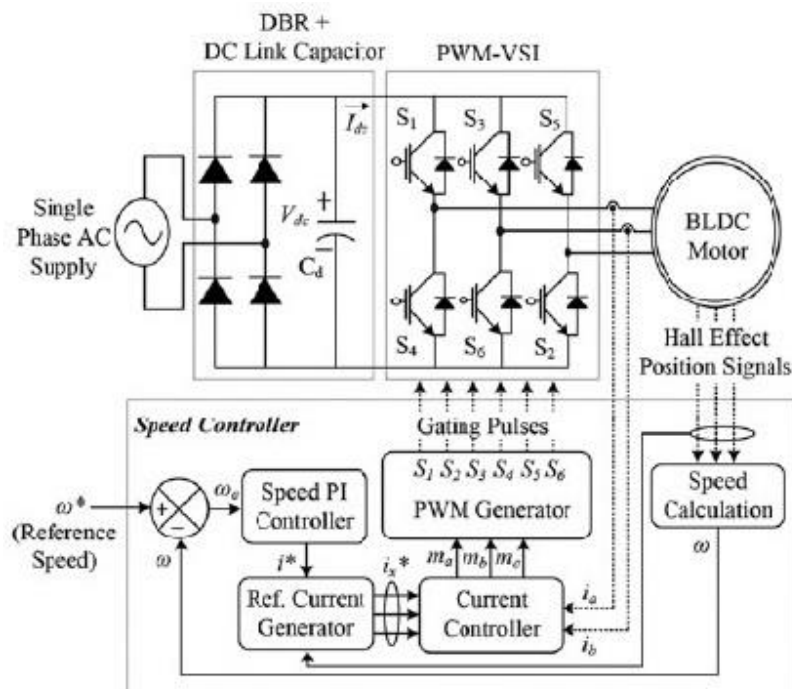


Figure 1. A conventional BLDC motor drive

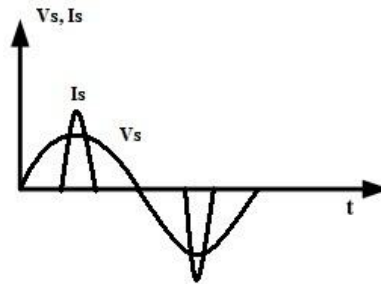


Figure 2. Source voltage and source current waveforms drawn by the filter capacitor³

PFC circuits are basically DC/DC voltage regulator circuits, usually connected between the output of the diode bridge rectifier and the input side of the VSI. These circuits regulate the dc-bus¹ voltage, and force the input current to be in-phase with the supply voltage; thus attaining a unity power factor at the supply side. This self-PFC² capability of these PFC converters is possible due to the innate characteristics of their topologies.

PFC converters can operate in two modes:

- i) Continuous Conduction Mode¹ (CCM)
 - ii) Discontinuous Conduction Mode¹ (DCM)
- i) Continuous Conduction Mode (CCM)-As the name suggests, in this operational mode, the inductor current or the capacitor voltage remains continuous and at no time falls to zero over a complete switching cycle. The main highlight of this mode is that it uses Current Multiplier Approach⁸, which requires two current sensors to detect the line currents and one voltage sensor to detect the dc-bus voltage. Thus, by shelling out more pennies, it is possible to reduce the voltage and current switching stresses on the converter switch. This mode is used for high-power^{1,6,8} applications due to its reduced switching stress capability.
 - ii) Discontinuous Conduction Mode (DCM) – In this mode, the inductor current or the capacitor voltage reaches zero and becomes discontinuous over a complete switching cycle. The main highlight of this mode is that, it works on Voltage Follower⁸ approach, which requires only one voltage sensor to detect the dc-link voltage. Hence, it is cheaper and attains inherent power factor at the ac mains; imposing a higher voltage and current switching stress on the PFC converter switch. Hence, this mode is preferred only for medium and low power^{1,6,8} applications where switching stresses can be compromised.

Choice of the topology of a PFC converter relies upon the efficiency, size, weight, cost and application, of the converter^{1,2,3,26}. And, the choice of the operational mode of a PFC converter is typically a trade-off between the switching stresses and the cost^{1,2,3,26}. This paper deals with categorization of various PFC converter circuits.

2. CLASSIFICATION OF PFC DC/DC CONVERTERS

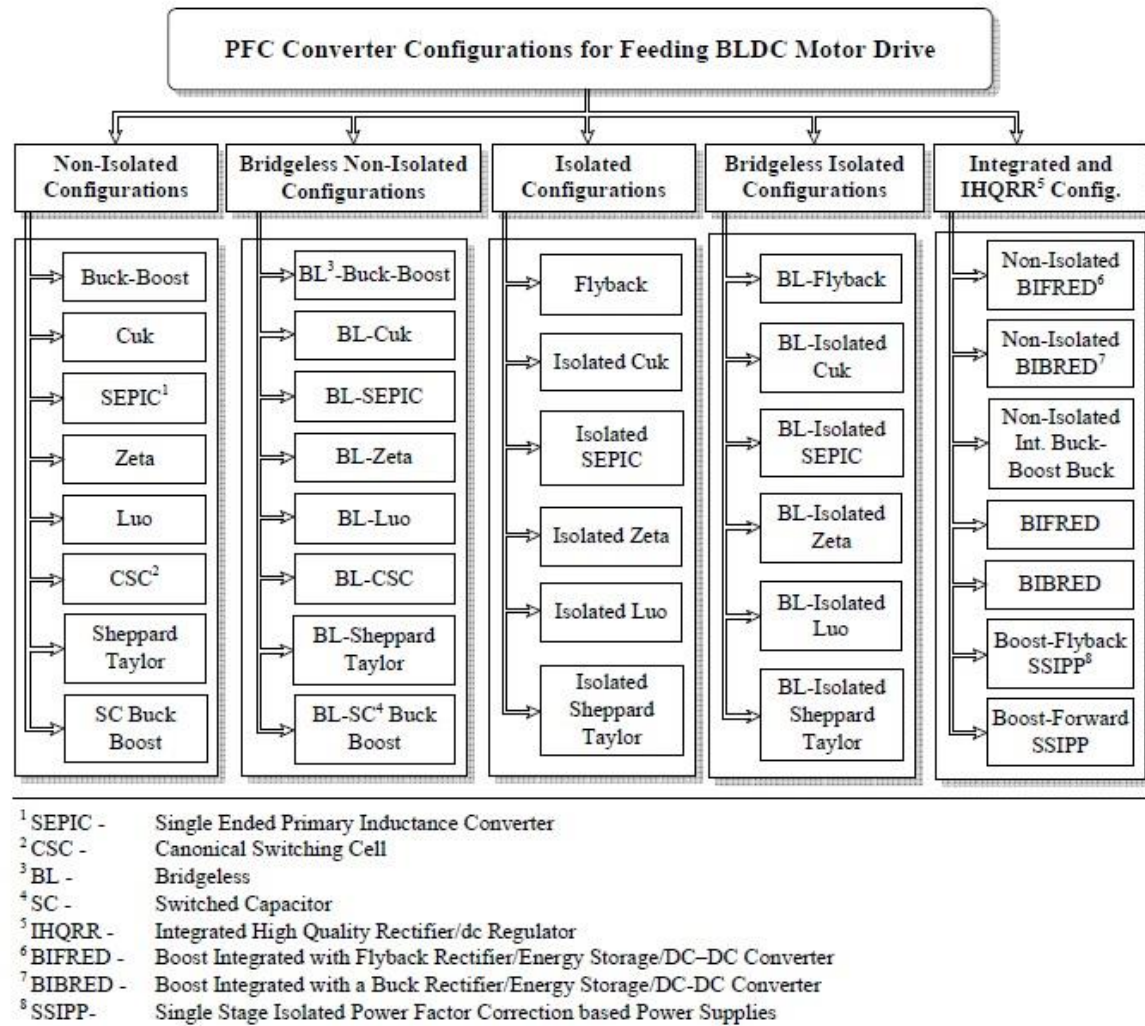


Figure 3. Classification of PFC DC/DC converters¹

This paper explains a detailed review on the classification of Power Factor Correction DC/DC converters. Power Factor Correction DC/DC converters are sub-divided into three categories¹ namely, Non-Isolated DC/DC Converters, Isolated DC/DC Converters, and Integrated High Quality Rectifiers (IHQRR). Each category of DC/DC converter is dealt in detail below.

2.1 Non-Isolated DC/DC converters

Non-isolated DC/DC converters are used in applications where galvanic isolation²⁷ is not required between the power stage and the output side. Hence, these converters do not require a high frequency transformer³ separating the input and output stages in their topologies. Main highlights of Non-Isolated Converter topologies include:

- Decreased component count
- Simple Design

- Light-weight & compact size
- Economical

Limitations of Non-Isolated Converter topologies include:

- These converters are not preferred in domestic applications like refrigerators which demand a galvanic isolation between the input and output stages
- Suffer from efficiency issues at low power levels.

Non-Isolated converters are further classified into:

- Bridged Non-Isolated Converters
- Bridge-less Non-Isolated Converters

depending on whether a diode bridge rectifier^{6,8,21} (DBR) is included in the circuit or not.

2.1.1 Bridged Non-Isolated DC/DC converters

Various topologies of Bridged Non-Isolated DC/DC converters include: Buck¹, Boost^{1,4,5}, Buck-boost^{1,6,7}, Cuk^{8,9}, SEPIC^{10,11,12}, Zeta^{13,14}, Luo¹⁵, Canonical Switching Cell,^{16,17}(CSC), Landsman¹⁸, Sheppard Taylor^{19,20} and Switched Capacitor Buck-Boost²⁸ converters. The Buck converter provides an output voltage, V_o lower than the input DC voltage, V_{in} given by:

$$V_o = D * V_{in} \quad (1)$$

Where, D denotes the duty ratio of the converter, such that, $0 < D < 1$. Boost converter provides an output voltage, V_o greater than the input DC voltage, V_{in} given by:

$$V_o = \left(\frac{1}{1-D} \right) V_o \quad (2)$$

Buck-boost^{1,6,7}, Cuk^{8,9}, SEPIC^{10,11,12}, Zeta^{13,14}, Landsman¹⁸, Switched-Capacitor Buck-Boost²⁸, and Canonical Switching Cell,^{16,17}(CSC) converters provide either step-up or step-down of the input DC voltage. The output voltage, V_o of these converters is given as:

$$V_o = \left(\frac{D}{1-D} \right) * V_{in} \quad (3)$$

These converters possess salient features which include:

- Excellent dynamic performance
- Enhanced light-load efficiency
- Excellent light-load voltage regulation capability

A Canonical Switching Cell (CSC)^{16,17} converter has a lower component count, lower conduction losses, and excellent light-load voltage regulation capability; while a Sheppard Taylor converter overcomes the problems of Control Detuning^{1,18,19,20}. Buck-Boost converter has least component

count, but has high input and output current ripple. Landsman converter; a modified CSC converter¹⁸ with an output inductor overcomes this problem with reduced output current ripple²⁹. Sheppard Taylor and Switched-Capacitor Buck-Boost converters are typically preferred for power factor correction at AC mains. Luo¹⁵ converter which has inherent characteristics of voltage lifting¹⁵, provides excellent voltage regulation over a wide range of DC voltages and excellent light-load efficiency¹⁵.

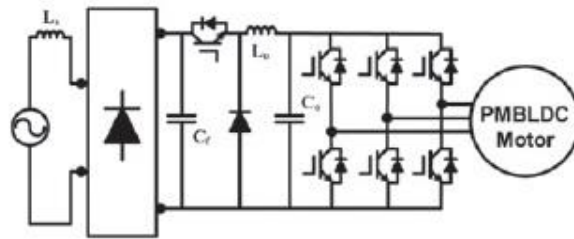


Figure 4. A Buck PFC converter-fed BLDC motor drive³⁰

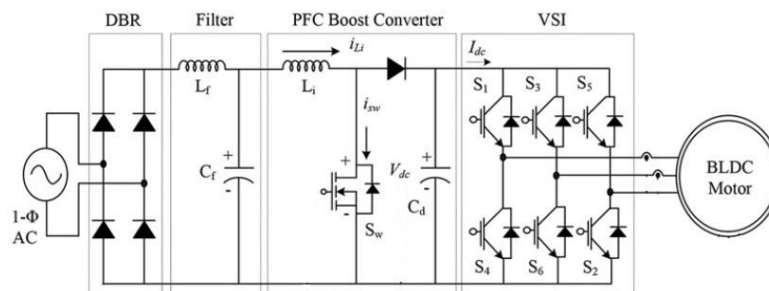


Figure 5. A Boost PFC converter-fed BLDC motor drive

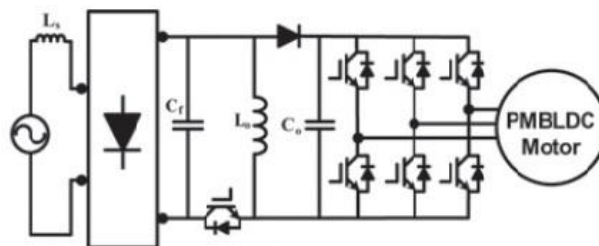


Figure 6. A Buck-Boost PFC converter-fed BLDC motor drive³⁰

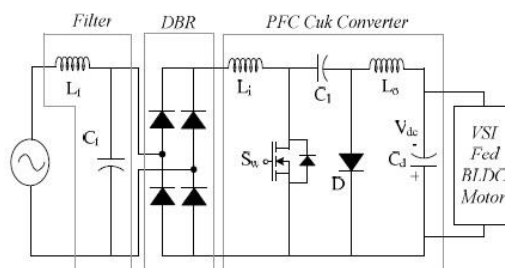


Figure 7. A Cuk PFC converter-fed BLDC motor drive^{1,8}

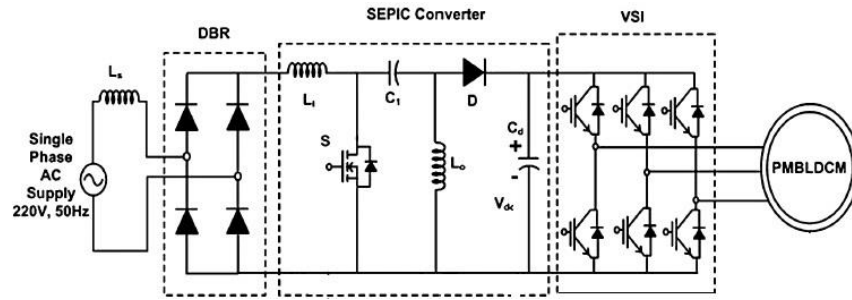


Figure 8. A SEPIC PFC converter-fed BLDC motor drive¹¹

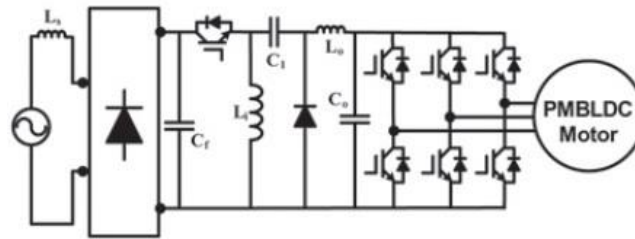


Figure 9. A Zeta PFC converter-fed BLDC motor drive³⁰

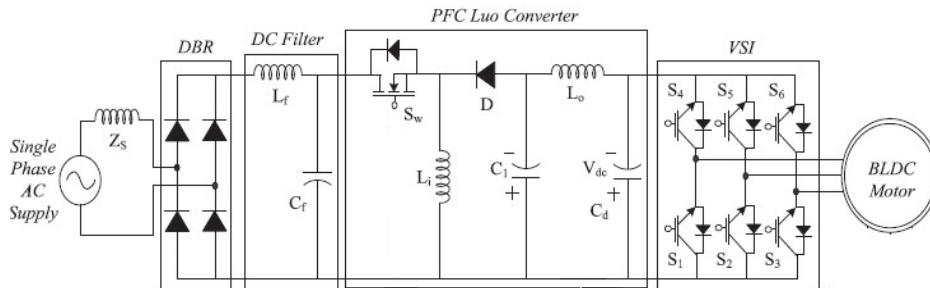


Figure 10. A Luo PFC converter-fed BLDC motor drive¹⁵

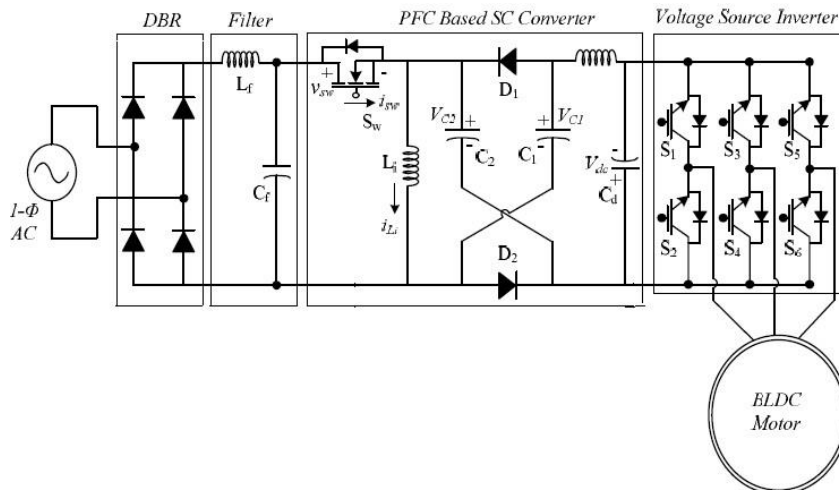


Figure 12. A Switched Capacitor Buck-Boost PFC converter-fed BLDC motor drive²⁸

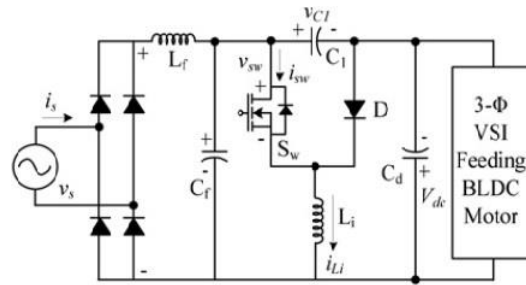


Figure 13. A Canonical Switching Cell (CSC) converter-fed BLDC motor drive¹⁸

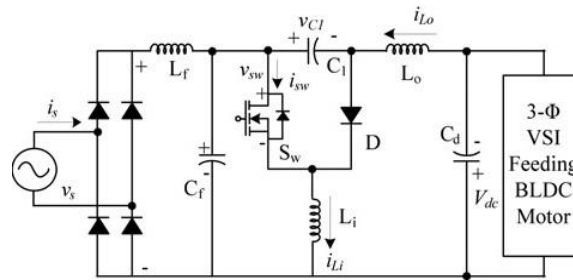


Figure 14. A Landsman PFC converter-fed BLDC motor drive¹⁸

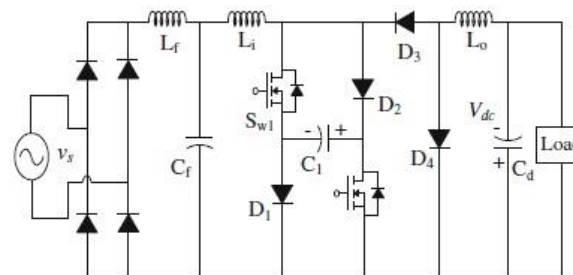


Figure 15. A Sheppard Taylor PFC converter-fed BLDC motor drive¹⁹

2.1.2 Bridge-less Non-Isolated DC/DC converters

Bridge-less configuration offers the advantage of the complete or partial elimination¹ of the diode bridge rectifier, thus minimizing conduction losses of the diodes, at the cost of a higher number of components.

Highlighting features of Bridge-less Non-Isolated DC/DC Converters include:

- Lower number of conducting components in a half-cycle
- Reduced conduction losses
- Increased efficiency of the converter

Limitation of this converter includes:

- Higher number of components involved
- Requires expensive and complex isolated gate drivers

Various topologies of Bridge-less converters include Bridge-less Buck-Boost⁶, Bridge-less Cuk³¹, Bridge-less Zeta³², Bridge-less SEPIC^{33,34}, Bridge-less Landsman³⁵, Bridge-less CSC³⁶, Bridge-less Luo³⁷, Bridge-less Switched-Capacitor Buck-Boost and Bridge-less Sheppard Taylor converters³⁸. Bridge-less Buck-Boost has minimum number of components and features highest efficiency amongst all the other bridgeless topologies. Bridge-less Cuk³¹ and Bridge-less SEPIC^{33,34} provides enhanced power quality at the AC mains.

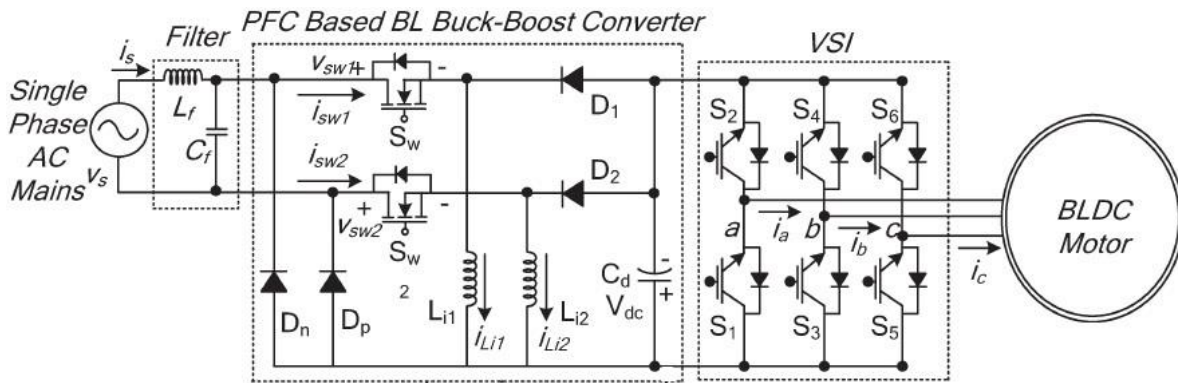


Figure 16. A Bridgeless Buck-Boost converter-fed BLDC motor drive⁶

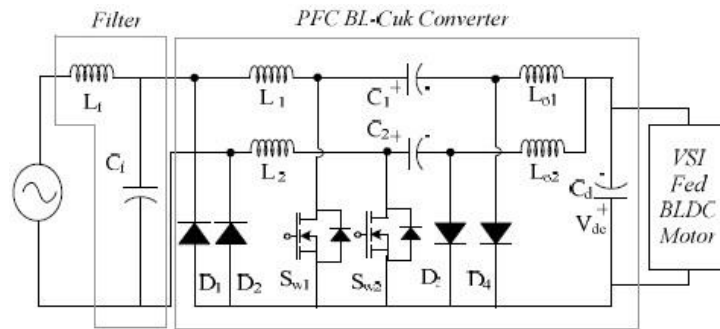


Figure 17. A Bridge-less Cuk converter-fed BLDC motor drive¹

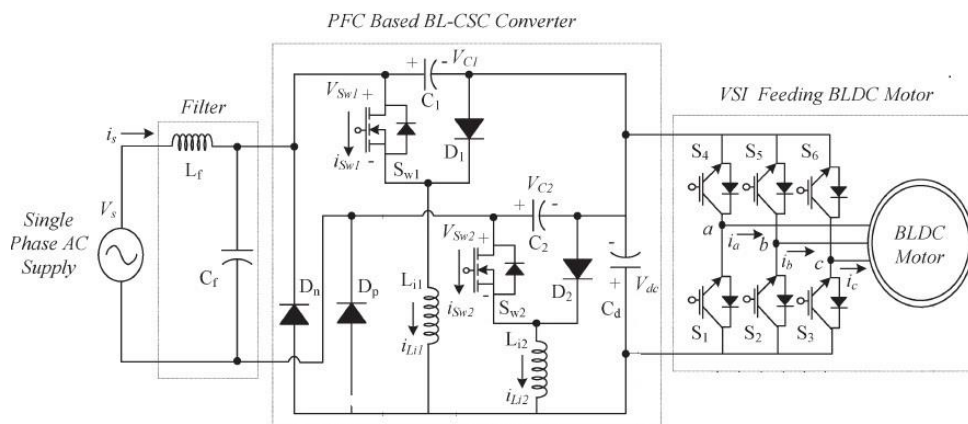


Figure 18. A Bridge-less CSC converter-fed BLDC motor drive³⁶

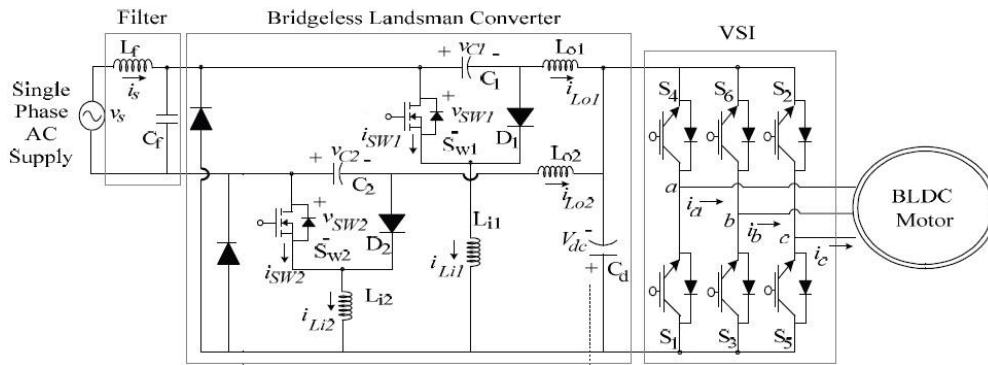


Figure 19. A Bridge-less Landsman converter-fed BLDC motor drive³⁵

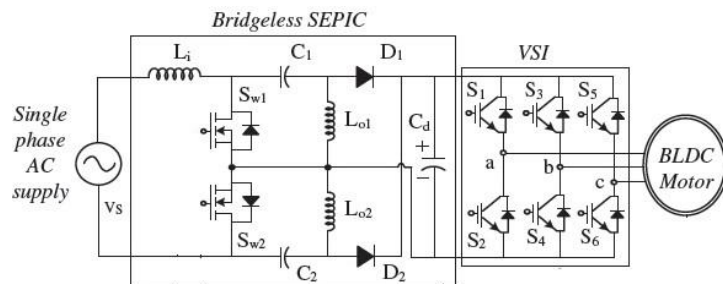


Figure 20. A Bridge-less SEPIC converter-fed BLDC motor drive^{33,34}

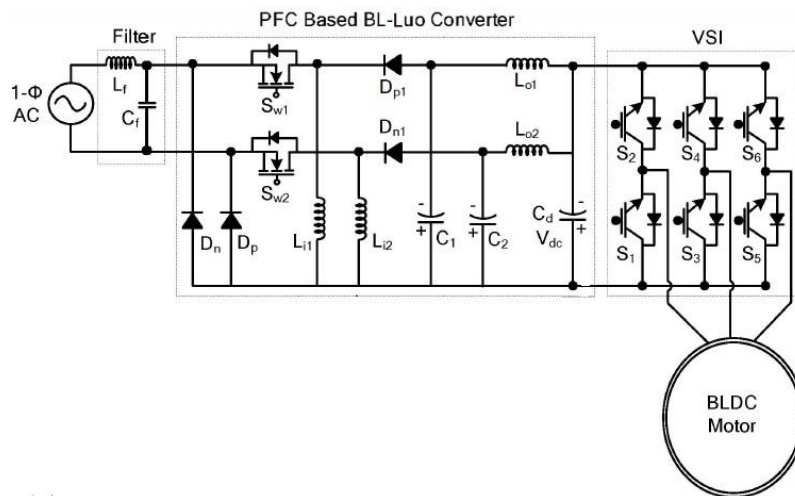
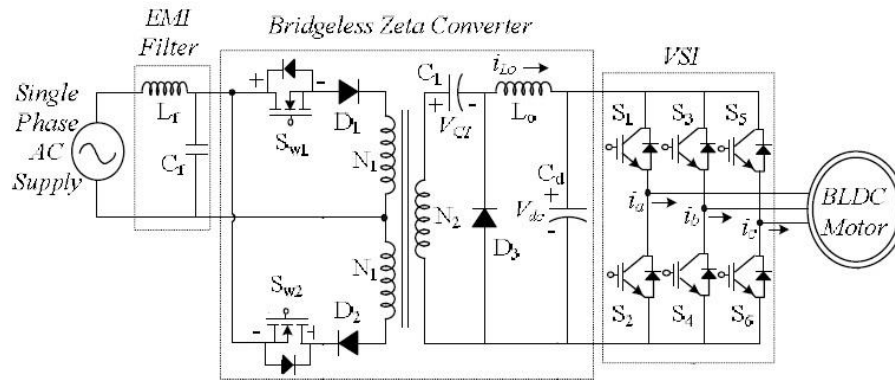
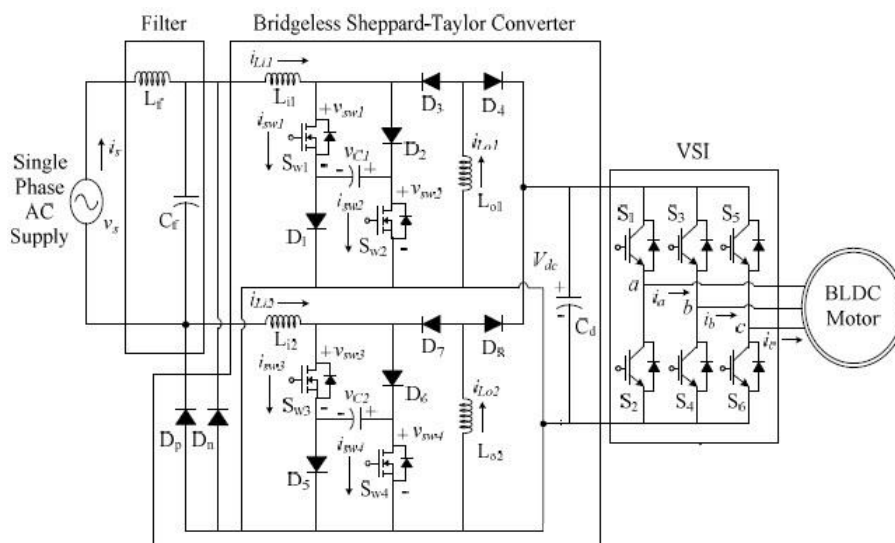


Figure 21. A Bridge-less Luo converter-fed BLDC motor drive³⁷

Figure 22. A Bridge-less Zeta PFC converter-fed BLDC motor drive³²Figure 23. A Bridge-less Sheppard Taylor PFC converter-fed BLDC motor drive³⁸

2.2 Isolated DC/DC converters

In these converters, a High Frequency Transformer (HFT) is added between the power stage and the output side². This provides the advantages of electrical isolation between input and output stages, voltage scaling, minimization of stresses in switching devices, and provision of multiple outputs in multi-output connections³. The isolated DC/DC converters are classified into:

- Bridged Isolated DC/DC Converters
- Bridgeless Isolated DC/DC Converters

depending on whether a full- bridge diode rectifier is included in the circuit or not.

2.2.1 Bridged Isolated DC/DC converters

Various topologies of the Bridged Isolated DC/DC converters include Isolated Buck, Isolated Boost, Isolated Buck-Boost, Isolated Cuk¹, Isolated SEPIC, Isolated Zeta³⁹, Isolated CSC, Isolated

Landsman, Isolated Luo⁴⁰ and Isolated Sheppard Taylor¹⁹ converters, Flyback³ Converter and Forward Converter. These converters provide enhanced power factor at the source side, low source current THD and reduced output voltage ripple³.

A Flyback³ converter has the minimum component count, but has higher stress on the PFC converter switch. Hence, it is preferred for low-power^{1,3} applications (100-150W) only. The main limitation of Flyback³ converter is the problem of leakage inductance, which introduces a cap on its rating. Isolated configurations of Cuk¹, Zeta³⁹, SEPIC converters are employed for high-power applications. Isolated Sheppard Taylor¹⁹ converter overcomes the problems of control detuning of BLDC motor drives. Isolated Luo⁴⁰ converter enhances power quality at the source-side of the drive. Output voltage, V_o of Isolated Buck-Boost, Isolated Cuk¹, Isolated SEPIC, Isolated Zeta³⁹, Flyback³ converters are given by:

$$V_o = \left(\frac{N_2}{N_1} \right) * \left(\frac{D}{1-D} \right) * V_{in} \quad (4)$$

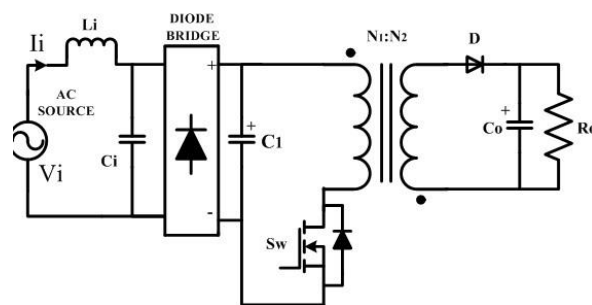


Figure 24. A Flyback converter³

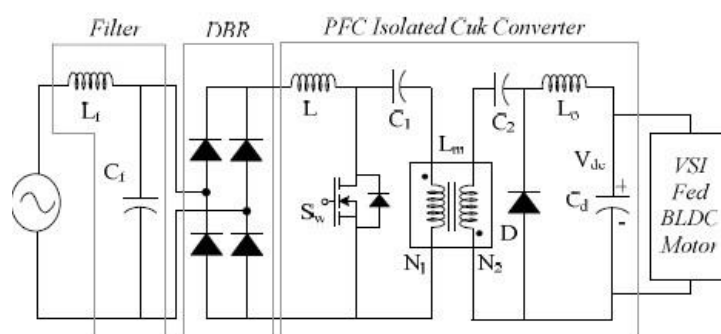


Figure 25. An Isolated Cuk converter-fed BLDC motor drive¹

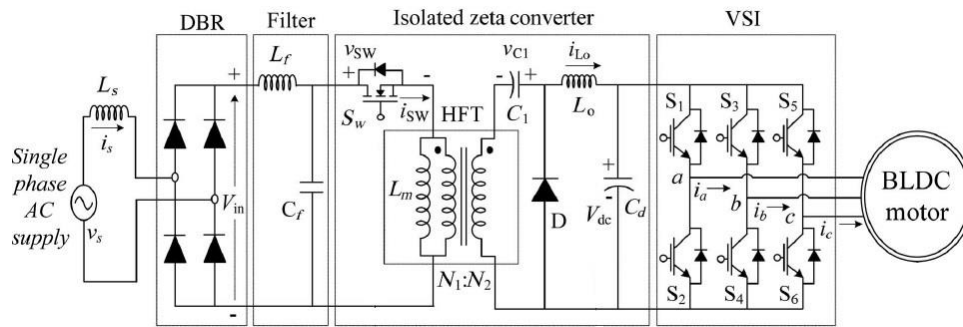


Figure 26. An Isolated Zeta converter-fed BLDC motor drive³⁹

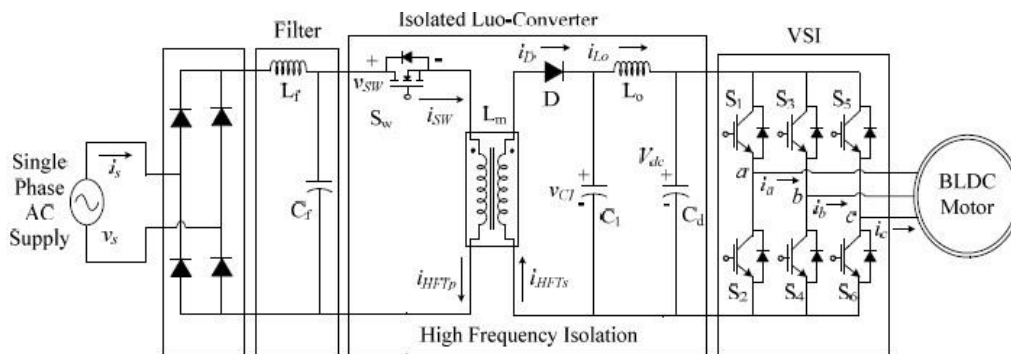


Figure 27. An Isolated Luo converter-fed BLDC motor drive⁴⁰

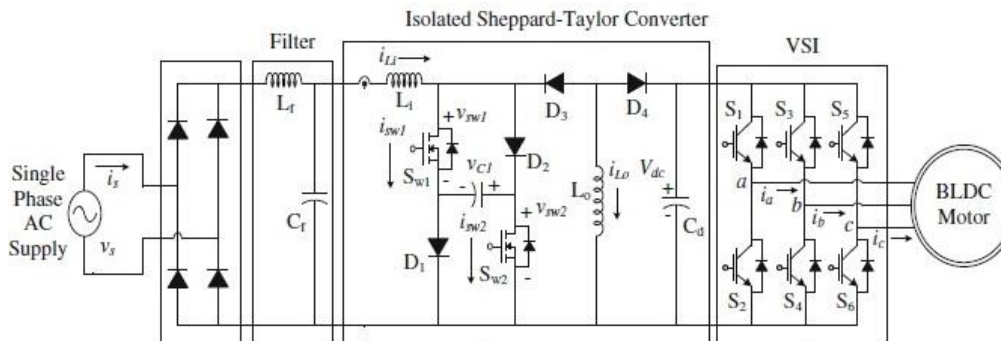


Figure 28. An Isolated Sheppard Taylor converter-fed BLDC motor drive¹⁹

2.2.2 Bridge-less Isolated DC/DC Converters

These converters integrate the salient features of the bridge-less configuration with high frequency isolation². Thus, the conduction losses at the source side of these converters are considerably reduced. Hence, these converters are utilized for improving power quality at the AC mains. A limitation of this converter is that, it suffers from efficiency issues due to the losses in the high frequency transformer³.

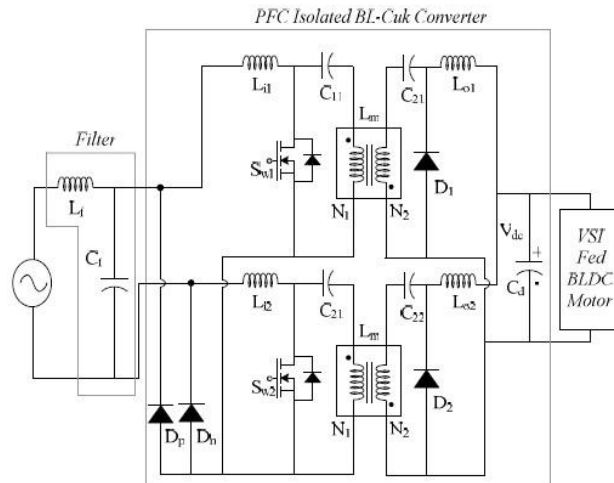


Figure 29. An Isolated Bridge-less Cuk converter-fed BLDC motor drive ^{1,41}

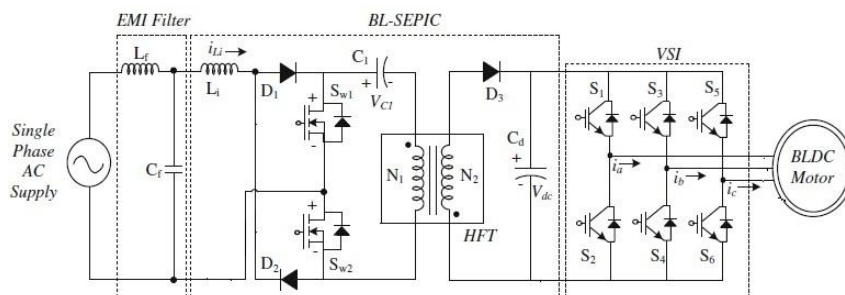


Figure 30. An Isolated Bridge-less SEPIC converter-fed BLDC motor drive ⁴²

2.3 Integrated and High Quality Rectifiers (IHQRR)

IHQRR ^{1,24,25} combines two converters for attaining an improved power quality at the AC mains. These converters incorporate a single switch which offers reduced switching losses, and thus possess high efficiency and performance similar to that of a single-stage converter ^{1,24,43}. The main features of these converters include:

- Excellent dynamic response
- High light-load voltage regulation capability
- High light-load efficiency

The main limitation of these converters is large component count in their topologies. IHQRRs are classified into two sub-categories namely:

- (i) BIFRED ^{1,42} Converter–Boost Integrated Flyback Energy-Storage DC Converter
- (ii) BIBRED1, ⁴³ Converter–Boost Integrated Buck-Rectifier Energy Storage DC Converter
- (iii) Integrated Buck-Boost Buck Converter ⁴⁴
- (iv) Boost-Flyback Single Switch Isolated Power Factor Correction based Power Supplies (Boost-Flyback SSIPP) ²⁵

(v) Boost-Forward Single Switch Isolated Power Factor Correction based Power Supplies (Boost-Forward SSIPP)²⁴

These converters can be further classified into Isolated and Non-Isolated^{1,2} converters. BIFRED is an IHQRR that integrates Boost PFC converter with a Flyback converter using a switch²⁶. The Boost converter in DCM operates as an innate PFC, whereas, the Flyback converter is allowed to operate in DCM or CCM, based on the requirement. The main features of a BIFRED Converter include:

- Simplicity, due to single switch and single control loop and isolation
- One-time processing of a small part of output power

In a BIFRED^{1,42} converter, the combination of DCM Boost and CCM Flyback, converter, increases the voltage on the storage capacitor significantly, and is load dependent. This is the main limitation of a BIFRED Converter. BIBRED^{1,43} converter has the following advantages:

- Inherent power factor correction
- Reduction in size of the high frequency transformer due to low value of magnetizing inductance, L_m .

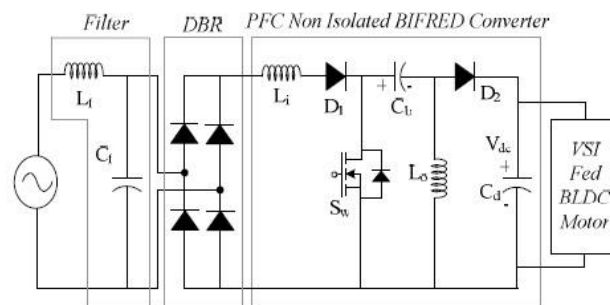


Figure 31. A Non-Isolated BIFRED converter-fed BLDC motor drive¹

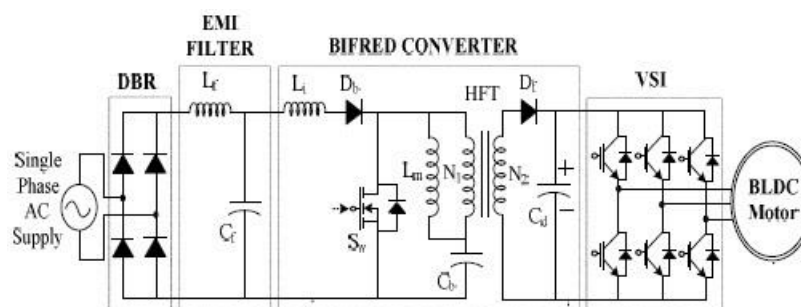


Figure 32. An Isolated-BIFRED converter-fed BLDC motor drive⁴³

Figure 33. A BIBRED converter-fed BLDC motor drive ^{1,44}

Fig. 34. An Integrated PFC Buck-Boost Buck converter-fed BLDC motor drive⁴⁵

Figure 35. A Boost-Flyback SSIPP PFC converter-fed BLDC motor drive²⁵

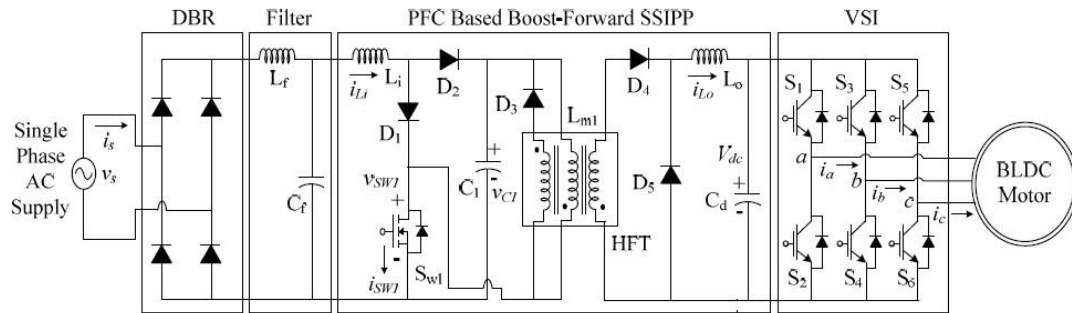


Figure 36. A Boost-Forward SSIPP PFC converter-fed BLDC motor drive²⁴

3. FUTURE PROSPECTS

With the rapid developments in the fields of semiconductor switching devices⁴⁶, super-fast micro-processors, digital control strategies, it is possible to develop efficient switching mechanisms, with reduced conduction and switching losses in the converters. Researches to develop new magnetic materials with comparatively higher flux densities can lead to the production of compact and highly efficient permanent magnets for BLDC motors⁴⁷. Utilization of highly sophisticated softwares like MagNet¹, Motor-Solve¹, SPEED¹ etc for the geometric design, aids in the development of highly energy-efficient BLDC motors. Wide band-gap devices can be used to improve the efficiency and speed of switching devices. Integration of different converter configurations^{48,49} helps develop topologies that can enhance the power quality and effectively correct the power factor simultaneously. Integration of several areas of active research, like artificial intelligence, fuzzy logic, neural networks and Internet Of Things (IOT) and Big Data into the existing digital control strategies^{50,51} will help develop new and faster switching schemes for the switching devices. Sensor-less control strategies opted for the control of BLDC motors can effectively reduce the overall drive cost on account of the reduction in sensors, and improves the drive performance in hazardous atmospheres.

4. CONCLUSION

Power Factor Correction converters have self PFC capability and provide excellent dc-bus voltage control over a broad speed range. This paper summarizes a broad classification of PFC converters. Non-Isolated topologies are preferred for low-cost and light weight applications, where the switching stresses can be compromised to attain economy. Isolated topologies are typically preferred for applications requiring a galvanic isolation, like refrigerators. Each of these topologies is further classified into Bridged and Bridgeless configurations. Bridged topologies have lower number of components, simple design, higher conduction losses and lower efficiencies for lower power levels; whereas, bridgeless configurations have larger number of components, lower number of

components conducting per half cycle, reduced conduction losses and improved efficiency of the converter. Buck, Boost, Buck-Boost, Cuk, SEPIC, Zeta, Luo, CSC, Landsman and Sheppard Taylor converter topologies can be either Isolated, Non-Isolated, Bridged or Bridgeless or the combination of any two configurations. IHQRR is another class of PFC converters which integrate two converter topologies for attaining improved power quality at the AC mains. They offer reduced switching losses, higher efficiency and performance similar to that of single-stage converters. IHQRR can be BIFRD or BIBRED; the former integrates a Boost PFC converter with a Flyback converter, and the later integrates a Boost PFC converter with a Buck converter. IHQRRs promise an inherent power factor correction, improved power quality at the AC mains and higher system efficiency. The two operational modes of PFC converters include Discontinuous conduction mode (DCM) and Continuous Conduction Mode (CCM). DCM operation of PFC converters is preferred for low-power applications; while, CCM operation of the converter is preferred for medium and high power applications. Finally, it can be inferred that, the choice of a particular topology of PFC converter relies upon its efficiency, size, weight, cost and application for which it is intended to be used. And, the choice of the operational mode of a PFC converter is typically a trade-off between the switching stresses and the cost.

REFERENCES

1. Singh B., Bist V., “*Power Factor Correction (PFC) converters feeding brushless DC motor drive*”. International Journal of Engineering, Science and Technology. 2015; 7(3): 65-75.
2. Wei H, Batarseh I., “*Comparison of Basic Converter Topologies for Power Factor Correction*”. Proceedings of IEEE Southeastcon '98 ‘Engineering for a New Era’, Orlando, USA. 1998; 348-353. Available from: URL: <https://doi.org/10.1109/SECON.1998.673368>
3. Mishra A. K., Pathak M. K., Das S., “*Isolated Converter Topologies for Power Factor Correction – A Comparison*”. Proceedings of 2011 International Conference on Energy, Automation and Signal, IEEE, Bhubaneswar, India. 2011; 49-55. Available from: URL: <https://doi.org/10.1109/ICAES.2011.6147078>
4. Crebier J.C., Revol B., Ferrieux J. P., “*Boost-Chopper Derived PFC converters: Interest and Reality*,” IEEE Trans. Ind. Electron. 2005; 52(1): 36-45.
5. Singh S., Singh S., “*Power Quality Improvement of a Position Sensorless Controlled PMBLDCM Drive Using Boost Converter*” [Online]. IEEE 6th India International Conference on Power Electronics (IICPE), IEEE, Kurukshethra, India. 2014 [cited 2014 December 10]. Available from: URL: <https://doi.org/10.1109/IICPE.2014.7115830>

6. Bist V., Singh B., "An Adjustable Speed PFC Bridgeless Buck-Boost converter-fed BLDC Motor Drive," IEEE Trans. Ind. Electron. 2014; 61(6):2667-2677.
7. Singh S., Singh B., "Power Quality Improved PMBLDCM Drive for Adjustable Speed Application with Reduced Sensor Buck-Boost PFC Converter," Proceedings of 2011 Fourth International Conference on Emerging Trends in Engineering & Technology(ICETET), IEEE, Port Louis, Mauritius. 2011; 180-184. Available from: URL: <https://doi.org/10.1109/ICETET.2011.39>
8. Bist V., Singh B., "PFC Cuk Converter-fed BLDC Motor Drive," IEEE Trans. Power Electron. 2015; 30(2): 871-888.
9. Singh S., Singh B., "Power Factor Correction in Permanent Magnet Brushless DC Motor Drive using Single-Phase Cuk Converter." J. Eng. Sci. Technol. 2010; 5(4): 412-425.
10. Raghu T., Chandrasekhar S., Rao J.S., "SEPIC converter based-drive for Unipolar BLDC Motor," Int. J. Electr. & Comp. Eng. 2012; 2(2): 159-165.
11. Singh B., Bist V., "DICM and DVCM of a PFC-based SEPIC-fed PMBLDCM drive," IETE J. Res. 2013; 59(2):141-149.
12. Bist V., Singh B., "Reduced Sensor Configuration of a power factor correction based single-ended primary inductance converter fed brushless DC motor drive," IET Power Electron. 2015; 8(9):1606-1615.
13. Singh S., Singh B., Bhuvaneswari G., et al., "Power Factor Corrected Zeta Converter Based Improved power Quality Switched Mode Power Supply," IEEE Trans. Ind. Electron. 2015; 6(9):5422-5433.
14. Singh S., Singh B., "Voltage controlled PFC Zeta converter based PMBLDCM drive for an air-conditioner". 2010 5th International Conference on Industrial and Information Systems, ICIIS 2010, Mangalore, India. 2010; 550-555. Available from: URL: <https://doi.org/10.1109/ICIINFS.2010.5578643>
15. Singh B., Bist V., "Power Quality Improvements in Power Factor Correction Luo Converter fed brushless direct current motor drive," Int. Trans. Electr. Energ. Syst., 2014. Available from URL: <https://doi.org/10.1002/etep.1882>.
16. Singh B., Bist V., "Reduced Sensor-based Improved Power Quality CSC Converter fed BLDC Motor Drive," 2012 IEEE International Conference on Power Electronics, Drives and Energy Systems (PEDES), Bengaluru, India 2012. Available from: URL: <https://doi.org/10.1109/PEDES.2012.6484280>
17. Singh B., Bist V., "A PFC-Based BLDC motor Drive Using a Canonical Switching Cell Converter," IEEE Trans. Ind. Informat. 2014; 10(2):1207-1215.

18. Singh P. K., Singh B., “Brushless DC motor Drive with power factor regulation using Landsman converter,” IET Power Electron. 2016; 1-11.
19. Singh B., Bist V., “An Improved Power Quality Based Sheppard-Taylor Converter fed BLDC Motor Drive,” J. Inst. Eng. India Ser. B. 2015; 96(4):327-337.
20. Tse C. K., Chow M. H. L., “New Single-Stage PFC Regulator using the Sheppard Taylor Topology,” IEEE Trans. Power Electron. 1998; 13(5):842-851.
21. Bist V., Singh B., “A Brushless DC Motor Drive with Power Factor Correction using Isolated Zeta Converter,” IEEE Trans. Ind. Electron. 2014; 10(4):2064-2072.
22. Singh B., Singh S., “Isolated Zeta PFC Converter Based Voltage Controlled PMBLDCM Drive for Air-Conditioning Application,” Proceedings of 2010 India International Conference on Power Electronics (IICPE), IEEE, New Delhi, India, 2011; 1-5. Available from: URL: <https://doi.org/10.1109/IICPE.2011.5728151>.
23. Bist V., Singh B., “Power Factor Correction in a Brushless DC Motor using an Isolated-Luo Converter” [Online]. 2014 6th IEEE Power India International Conference (PIICON), IEEE, New Delhi, India, 2014 [cited 2014 December 7]. Available from: URL: <https://doi.org/10.1109/POWERI.2014.7117627>.
24. Bist V., Singh B., “Power Factor Correction in a Brushless DC Motor Drive using a Boost-Forward SSIPP,” [Online]. 2014 Annual IEEE India Conference (INDICON), Pune, India, 2014 [cited 2014 December 13]. Available from: URL: <https://doi.org/10.1109/INDICON.2014.7030365>.
25. Singh B., Bist V., “An Improved Power Quality Boost-Flyback SSIPP fed BLDC Motor Drive,” Int. J. Power Electron. 2014; 6(2):179-200.
26. Singh B., Singh S., “Single-phase power factor controller topologies for permanent magnet brushless DC motor drives,” IET Power Electron. 2010; 3(2):147–175.
27. Bist V., Singh B., “A Unity Power Factor Bridgeless Isolated Cuk Converter-fed Brushless DC Motor Drive,” IEEE Trans. Ind. Electron. 2015; 62(7): 4118-4129.
28. Singh B., Bist V., “A PFC Based Switched-Capacitor Buck-Boost Converter fed BLDC Motor Drive,” [Online]. 2013 Annual IEEE India Conference (INDICON), Mumbai, India, 2013 [cited 2013 December 15]. Available from: URL: <https://doi.org/10.1109/INDCON.2013.6725951>
29. Kumar P., Singh B., Bist V., et al. “A Single-Sensor Based Bridgeless Landsman PFC Converter fed BLDC Motor Drive,” Proceedings of 2015 IEEE Industry Applications Society Annual Meeting, IEEE, Texas, USA, 2015; 1-8. Available from: URL: <https://dx.doi.org/10.1109/IAS.2015.7356804>

30. Singh B., Singh S., “Single-phase power factor controller topologies for permanent magnet brushless DC motor drives,” IET Power Electronics. 2010; 3(2):147–175.
31. Singh B., Bist V., “Improved Power Quality Bridgeless Cuk Converter fed Brushless DC Motor drive for air-conditioning applications,” IET Power Electron. 2013; 6(5): 902-913.
32. Bist V., Singh B., “A Reduced Sensor PFC BL-Zeta converter based VSI fed BLDC Motor Drive,” Electr. Pow. Syst. Res. 2013; 98:11-18.
33. Singh B., Bist V., ChandraA, et al. “An Adjustable Speed PFC Bridgeless SEPIC fed Brushless DC Motor Drive,” Proceedings of IEEE Energy Conversion Congress and Exposition (ECCE), IEEE, Montreal, Canada, 2015; 4886-4893. Available from: URL: <https://dx.doi.org/10.1109/ECCE.2015.7310349>
34. Singh B., Bist V., “Power-Quality Improvement in PFC Bridgeless SEPIC-fed BLDC Motor Drive,” International Journal of Emerging Electric Power Systems. 2013; 14(3): 285-296.
35. Kumar P., Singh B., Bist V., et al. “A Single-Sensor Based Bridgeless Landsman PFC Converter fed BLDC Motor Drive,” Proceedings of 2015 IEEE Industry Applications Society Annual Meeting, IEEE, Texas, USA, 2015; 1-8. Available from: URL: <https://dx.doi.org/10.1109/IAS.2015.7356804>
36. Singh B., Bist V., “A BL-CSC Converter fed BLDC Motor Drive with Power Factor Correction,” IEEE Trans. Ind. Electron. 2015; 62(1):172-183.
37. Singh B., Bist V., Chandra A., et al. “Power Quality Improvement in PFC Bridgeless Luo Converter fed BLDC Motor Drive,” Proceedings of 2013 IEEE Industry Applications Society Annual Meeting, Florida, USA, 2013; 1-8. Available from: URL: <https://dx.org/10.1109/IAS.2013.6682498>
38. Bist V., Singh B., “A PFC Based Bridgeless Sheppard-Taylor Converter fed Brushless DC Motor Drive,” Proceedings of International Conference on Innovative Applications of Computational Intelligence on Power, Energy and Controls with their Impact on Humanity (CIPECH14), Ghaziabad, India, 2014; 262-267. Available from: URL: <https://dx.doi.org/10.1109/CIPECH.2014.7019083>
39. Singh B., Singh S., “Isolated Zeta PFC Converter Based Voltage Controlled PMBLDCM Drive for Air-Conditioning Application,” Proceedings of 2010 India International Conference on Power Electronics (IICPE), New Delhi, India, 2010; 1-5. Available from: URL: <https://dx.doi.org/10.1109/IICPE.2011.5728151>
40. Bist V., Singh B., “Power Factor Correction in a Brushless DC Motor using an Isolated-Luo Converter,” 2014 6th IEEE Power India International Conference (PIICON), Delhi, India, 2014. Available from: URL: <https://dx.doi.org/10.1109/POWERI.2014.7117627>

41. Bist V., Singh B., “A Unity Power Factor Bridgeless Isolated Cuk Converter-fed Brushless DC Motor Drive,” IEEE Trans. Ind. Electron. 2015; 62(7): 4118-4129.
 42. B. Singh, V. Bist, A. Chandra, A, et al., “Sensor Reduction in a PFC Based Isolated BL-SEPIC fed BLDC Motor Drive,” Systems Thinking Approach for Social Problems, Lecture Notes in Electrical Engineering 327, Springer India: India; 2015; 347-362.
 43. Singh B., Bist V., “Improved Power Quality IHQRR-BIFRED Converter fed BLDC Motor Drive,” J. Power Electron. 2013; 13(2):256-263.
 44. Singh B., Bist V., “An Improved Power Quality BIBRED Converter-based VSI-fed BLDC Motor Drive,” International Journal of Emerging Electric Power Systems. 2014; 15(1):25-33.
 45. Bist V., Singh B., “A Single Sensor, Single Switch Integrated PFC Buck-Boost Buck Converter fed BLDC Motor Drive,” Asian Power Electronics Journal. 2014; 8(2):43-49.
 46. Singh B., Singh S., “State of Art on Permanent Magnet Brushless DC Motor Drive,” J. Power Electron., 2009; 9:1-17.
 47. Singh B., “Recent Advances in Permanent Magnet brushless DC Motors,” Sadhana –Acad. P. Eng. S., 1997; 22:837-853.
 48. Singh B., Singh N. B., Chandra A., et al., “A Review of Single-Phase Improved Power Quality AC-DC Converters,” IEEE Trans. Ind. Electron. 2003; 50: 962-981.
 49. Lee B. K., Fahimi B., Ehsani M., “Overview of Reduced Parts Converter Topologies for AC Motor Drives,” Proceedings of 2001 IEEE 32nd Annual Power Electronics Specialists Conference, Canada, 2001; 4: 2019-2024. Available from: URL: <https://dx.doi.org/10.1109/PESC.2001.954418>
 50. Sathyan A., Milivojevic N., Lee Y-J, et al. “An FPGA based Novel Digital PWM Control Scheme for BLDC Motor Drives,” IEEE Trans. Ind. Electron. 2009; 56(8): 3040-3049.
 51. Paul A. P., George M., “Brushless DC Motor Control using Digital PWM Technique,” Proceedings of 2011 International Conference on Signal Processing, Communication, Computing and Networking Technologies (ICSCCN 2011), IEEE, 2011; 733-738. Available from: URL: <https://dx.doi.org/10.1109/ICSCCN.2011.6024647>
-